

PORCELAIN CARRARA COLLECTIONS

SHUANGOU TILES



exterior wall	interior wall	exterior floor	interior floor	bathroom floor
○	○	×	○	○

IK97901

Chip Size (mm) :97×97

Sheet Size(mm) :300×300

SHUANGOU TILES



Y33F901

Chip Size (mm) :32.5×145

Sheet Size(mm) :284×296

Do not use acidic or alkaline cleaners for maintenance
 メンテナンスに酸性またはアルカリ性のクリーナーを使用しないでください

SHUANGOU TILES

Unique Beauty

With one of the most robust selections of natural stone in the industry, we ensure the unique beauty of every piece is emphasized by thoughtfully selecting each finish and edge style.



IK25901
 Chip Size (mm) : 25×25
 Sheet Size (mm) : 302×302



exterior wall	interior wall	exterior floor	interior floor	bathroom floor
○	○	×	○	○

HX4860M

Chip Size (mm) : 48×56
 Sheet Size (mm) : 330×280

RM4933

Chip Size (mm) : 45×145
 Sheet Size (mm) : 284×365

Dynamic Design

Any space with unparalleled beauty. Whether to addThe subtle details of neutral tiles or enhance more Eye-catching options, visually interesting moments of textureCreate a more dynamic design.




exterior wall	interior wall	exterior floor	interior floor	bathroom floor
○	○	×	○	○

SHUANGOU TILES

IK058

Chip Size (mm) :48×48
Sheet Size(mm) :306×306

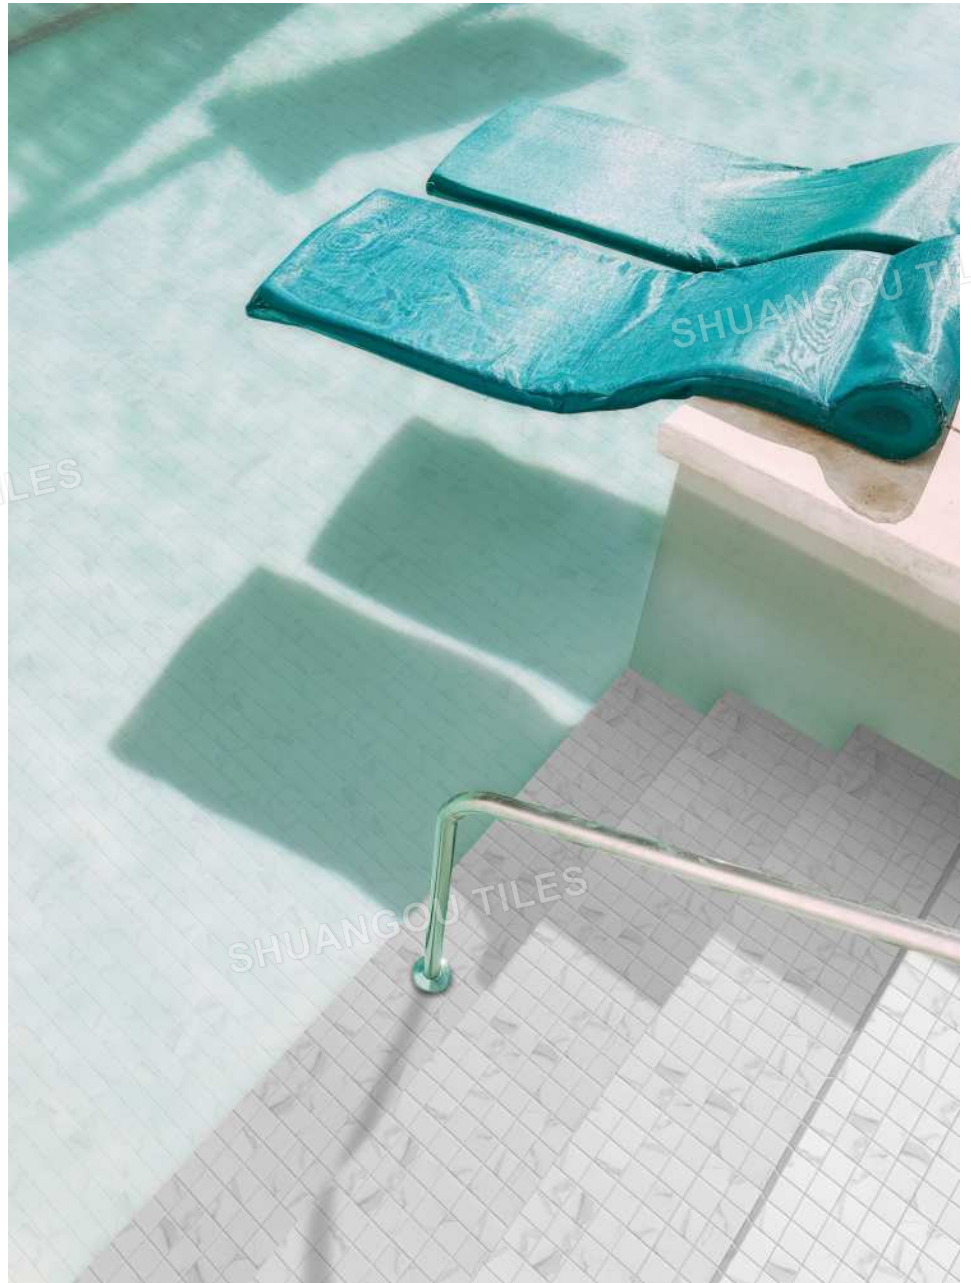

We will do the paving after ordering, so please check the delivery date.

ご注文後に舗装を行いますので、納期をご確認ください。

exterior wall	interior wall	exterior floor	interior floor	bathroom floor
○	○	×	○	○

SHUANGOU TILES

We will do the paving after ordering, so please check the delivery date.

ご注文後に舗装を行いますので、納期をご確認ください。



IK058

Chip Size (mm) :48×48

Sheet Size(mm) :306×306



SHUANGOU TILES



SHUANGOU TILES

SHUANGOU TILES



Ik97901

Chip Size (mm) :97×97

Sheet Size(mm) :300×300




SHUANGOU TILES

SHUANGOU TILES

SHUANGOU TILES

SHUANGOU TILES

SHUANGOU TILES

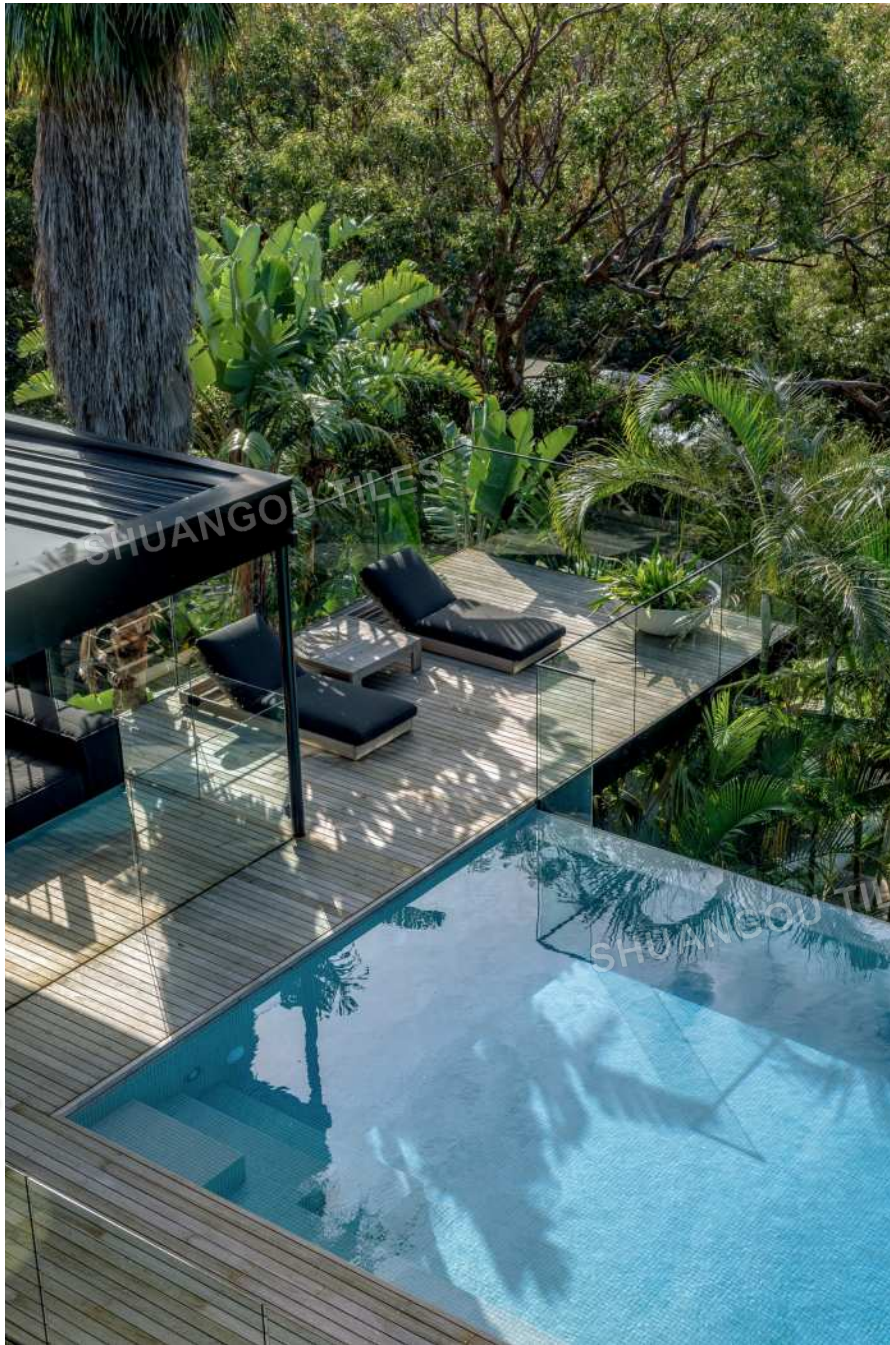

Free design services take the guesswork out of tile design by consulting one of our skilled tile experts. they'll answer any questions you may have so you can feel confident in starting your next project. schedule a free design consultation online.

のタイルを選ぶとき、おめでとうございます。デザインについて心配する必要はありません。経験豊富なモザイクデザイナーにいつでもどこでも連絡できます。彼らはあなたの質問に辛抱強く答え、参考のために無料のレンダリングを送信します。



Ik97901

Chip Size (mm) :97x97

Sheet Size(mm) :300x300

Carrara Marble Porcelain Mosaic Tile

カララ大理石の磁器モザイクタイル

Made in CHINA



Precautions for the product
製品についての注意

●Because of the different batches of the product, the purity of the white color will be slightly different. ●Because of the craftsmanship, the color difference and poor gloss of the tiles will appear, especially in the white construction site. This is a normal phenomenon.
●製品のバッチが異なるため、白色の純度はわずかに異なります。 ●商品についてのご注意 ●意匠上大きな色むらと色幅があります。 ●製法上白色のタイルは色むら●光沢むらがあります。これは正常な現象です。工場を出る前に、品質検査部門が定期的に品質チェックを実施し、全体的な色と色の効果がBefore paking, our quality inspection department will conduct regular quality inspections to ensure the the color and luster effect meet the application 使用されている基準を満たしていることを確認します。 ●メンテナンスに酸性またはアルカリ性のクリーナーを使用しないでください。 standards. ●Do not use acidic or alkaline cleaners for maintenance.

Attention on tiling
工事上の注意について

●If the product needs to be cut during the paving process, please use a tile cutter or glass cutter for the cut surface, and polish the cut surface with a grindstone to avoid injury. ●Please do not use a sander to cut, because it may cause accidents or product damage, and is very dangerous.
●舗装中に切断が必要な場合は、切断面にタイルカッターまたはガラスカッターを使用し、けがをしないように砥石で切断面を研磨してください。 ●事故や製品の破損の原因となり、非常に危険ですので、サンダーを使用して切断しないでください。

It is recommended to use white or light-colored adhesives
白または明るい色の接着剤を使用することをお勧めします

●Please note that please use adhesive on a flat surface to complete and paste. Also, be careful not to leave air on the back of the tiles.
●完成させて貼り付けるには、平らな面に接着剤を使用してください。また、タイルの裏側に空気を残さないように注意してください。



Carrara Marble Mosaic Tile
カララ大理石の磁器モザイク



ITEM:12015
SHEET SIZE:600x1200mm
SURFACE:SOFT LIGHT

Carrara Marble Mosaic Tile
カララ大理石の磁器モザイク




ITEM:3830
SHEET SIZE:300x600mm
SURFACE:MATT

Strip Carrara Marble Mosaic Tile
ストリップカララ大理石の磁器モザイク







ITEM:Y33F901
SHEET SIZE:296x284mm
SURFACE:MATT

Hexagon Carrara Marble Mosaic Tile
六角形カララ大理石の磁器モザイク



ITEM:HX4860M
SHEET SIZE:325x282mm
SURFACE:MATT

Carrara Marble Mosaic Tile	Carrara Marble Mosaic Tile	Strip Carrara Marble Mosaic Tile	Hexagon Carrara Marble Mosaic Tile
----------------------------	----------------------------	----------------------------------	------------------------------------



PRODUCE	Carrara Marble Mosaic Tile	Carrara Marble Mosaic Tile	Strip Carrara Marble Mosaic Tile	Hexagon Carrara Marble Mosaic Tile
SHEET SIZE(mm)	600x1200	300x600	296x284	282x325
WEIGHT (kg)/BOX	36	27	22	23
SHEET/BOX	2	10	22	22
SQUARE/BOX	1.4	1.8	2	2.06
CHIP SIZE(mm)	11	7.5	6.8	6

● The size is shown as a standard size. Please note that there are dimensional errors depending on the batch, so please pay attention when distributing and cutting the tiles.
(サイズは標準サイズで表示しておりますが、バッチによっては寸法誤差がありますので、タイルの配布やカットにはご注意ください。)

Carrara Marble Porcelain Mosaic Tile

カラーラ大理石の磁器モザイクタイル


Made in CHINA



Precautions for the product ●Because of the different batches of the product, the purity of the white color will be slightly different. ●Because of the craftsmanship, the color difference and poor gloss of the tiles will appear, especially in the white construction site. This is a normal phenomenon. ●製法上白色のタイルは色むら●光沢むらがあります。これは正常な現象です。工場を出る前に、品質検査部門が定期的に品質チェックを実施し、全体的な色と色の効果がBefore paking, our quality inspection department will conduct regular quality inspections to ensure the the color and luster effect meet the application standards. ●Do not use acidic or alkaline cleaners for maintenance.

About application of the products ●Please leave a gap width of 3mm for tiling. ●After removing the glue on the surface of the tile, wipe clean the remaining glue on the joints of the tile. ●For detailed construction guidelines, please refer to "Tile Construction Guidelines". ●工事は3mmの隙間幅をご利用ください。●タイルの表面の接着剤を取り除いた後、タイルの表面に残っている接合部を拭いてきれいにするために接合部の建設に進みます。●詳細な施工ガイドラインについては、「タイル施工ガイドライン」を参照してください。

Regarding customized products ●Support mixed paste and independent design services, welcome to inquire. ●カスタマイズモデルについて ●混合ペーストと独立したデザインサービスをサポートし、お問い合わせを歓迎します。



97Carrara Marble Mosaic Tile
97カラーラ大理石の磁器モザイク



ITEM:IK97901
SHEET SIZE:300x300mm
SURFACE:MATT

Octagon Carrara Marble Mosaic Tile
八角形カラーラ大理石の磁器モザイク




ITEM:YH9051
SHEET SIZE:310x310mm
SURFACE:MATT

48Carrara Marble Mosaic Tile
48カラーラ大理石の磁器モザイク



ITEM:Y48901
SHEET SIZE:306x306mm
SURFACE:MATT


25Carrara Marble Mosaic Tile
25カラーラ大理石の磁器モザイク



ITEM:IK25901
SHEET SIZE:302x302mm
SURFACE:MATT







ITEM:IK9760M
SHEET SIZE:300x300mm
SURFACE:MATT



ITEM:YH9055
SHEET SIZE:310x310mm
SURFACE:MATT

97Carrara Marble Mosaic Tile Octagon Carrara Marble Mosaic Tile 48Carrara Marble Mosaic Tile 25Carrara Marble Mosaic Tile




PRODUCE	97Carrara Marble Mosaic Tile	Octagon Carrara Marble Mosaic Tile	48Carrara Marble Mosaic Tile	25Carrara Marble Mosaic Tile
SHEET SIZE(mm)	300x300	310x310	306x306	302x302
WEIGHT (kg)/BOX	23.5	23	23	19
SHEET/BOX	22	22	22	22
SQUARE/BOX	2	2	2.06	2
CHIP SIZE(mm)	6	6	6	5

● The size is shown as a standard size. Please note that there are dimensional errors depending on the batch, so please pay attention when distributing and cutting the tiles.
(サイズは標準サイズで表示しておりますが、バッチによっては寸法誤差がありますので、タイルの配布やカットにはご注意ください。)

Technical Info

技術的な情報

	性能 Properties	检测方法 Test Method	要求 Requirements	检验结果 Results	判定 Verdicts
	长度和宽度 Length and Width 每块砖的平均尺寸相对于工作尺寸的允许偏差 The deviation of the average size for each tile (4 sides) from the work size	18010545-2:2018	N<7cm	-0.39%~+0.19%	N/A
				-0.2mm~+0.1 mm	N/A
	厚度 Thickness 每块砖厚度的平均值相对于工作尺寸的最大允许偏差 The deviation of the average thickness of each tile from the work size thickness	18010545-2:2018	N<7cm	-1.1%~+0.4%	N/A
				-0.1mm~0	N/A
	吸水率 Water absorption 质量分数 Percent mass fraction	ISO 10545-3:2018	Ev≤0.5%	0.15%	P
			单个值不大于0.6% Individual maximum 0.6%	0.05% 0.1 2%	P
	断裂模数(N/mm ²) Modulus of rupture, in N/mm ² 不适用于破坏强度≥3000N的陶瓷砖 Not applicable to tiles with breaking strength≥3000N	ISO 10545-4:2019	平均值≥35 Minimum 35	50.1-67.5	P
			单个值≥32 Individual maximum 32	50.1	P
	耐磨性 Abrasion resistance 用于地面的有釉砖的表面耐磨性 Resistance to surface abrasion of glazed tiles intended for use on floors	ISO 10545-7:1996	报告耐磨级别 Report abrasion class	2级 Class 2	-
			报告耐磨转数 Report cycles passed	600	-
	表面质量 Surface quality	18010545-2:2018	至少有95%的砖其主要区域无明显缺陷 A minimum 95% of the tiles shall be free from visible defec inspected vertically at 1.0m.	100%	P
	线性热膨胀系数: 室温 100C Coefficient of linear thermal expansion: from ambient temperature to 100°C	ISO 10545-8:2014	报告检验结果 Test method available	-	N/A
	抗热震性 Thermal shock resistance	ISO 10545-9:2013	报告检验结果 Test method available	样品经试验, 无炸裂或剥落 TFully resistance	-
	抗釉裂性: 有釉砖 Crazing resistance: glazed tiles	ISO 10545-11:1994	应通过此项测试 Required	样品经试验, 无裂纹或剥落 TFully resistance	P
	抗冻性 Frost resistance	ISO 10545-12:1995/ Cor1:1997	应通过此项测试 Required	所有样品, 无裂纹或破损 TFully resistance	P
	莫氏硬度 Scratch hardness of surface according to Mohs	EN 15771:2010	报告检验结果 Test method available	6	-
	破坏强度/N Breaking strength, in N	ISO 10545-4:2019	≥700	943	P

Guideline for Mosaic Tile Paving

1.SKIMMING

This is a step that serves to render the substrate selected for tiling perfectly smooth, uniform and white (a substrate showing differences in color will spoil the appearance of the finished mosaic).

2.STARTING LINES

Draw lines on the surface of the substrate to aid correct positioning of the sheets. Lay three sheets out the floor side by side, so that the gap between the sheets is the same as the gap between the single tessera, and measure the overall width. Transfer this measurement both horizontally and vertically to the surface being covered and using a straightedge and a spirit level, mark out a grid, the area will now be divided into a number of squares, each corresponding to nine sheets of mosaic.

3.PREPARING THE ADHESIVE

Prepare the adhesive, and spread over an area no larger than will be occupied by the first nine sheets, using the trowel. First apply a thick coat with the smooth edge of the tool, drawing the teeth across evenly and “combing” the adhesive to produce a uniformly ridged bed. The sheets can now be positioned.

4.LAYING AND FIXING

The sheets are back-mounted to a mesh that should be directly applied to the bed of adhesive. On walls, the thicker strands of mesh should be positioned vertically. Please note: the gap separating adjacent sheets must be the same as the gap between single tessera.

5.A FIRM BOND

With the sheets in place, tap the tessera home with a float so that the mesh beds firmly into the adhesive.

6.A PERFECT END RESULT

With all the sheets laid or fixed, and before the adhesive begins to set, the distance between tessera can be adjusted to ensure that all gaps are of uniform width. This is done by cutting through the mesh along the gap with a knife and edging the adjoining tessera marginally closer together or farther apart with the aid of a trowel. This is a step of the mosaic tiling procedure that calls for patience, but one that also adds considerable value to the finished job.

7.GROUTING

Make sure to use all of the grout. Using the small trowel, scoop the grout, a little at a time, onto the float and begin applying to the mosaic. Move the tool diagonally across the tessera, first from the bottom up and then squeegee downwards in the opposite direction, making certain that all of the joints are completely filled and that no excess remains.

8.CLEANING

Before the grout hardens, begin cleaning off the surface. prepare two buckets of this solution: immerse the pad in the first, and without winging, swab the surface of the mosaic repeatedly with a circular motion. Next, immerse the sponge in the second bucket and wipe down the surface, removing all residual traces of grout. Finally, wipe down with the sponge, this time using clean water to remove any smears, leaving the mosaic sparklingly clean.



Foshan city ShuangOu ceramics co., Ltd

Address: Nanzhuang street, 525100 Foshan, Guangdong, China

Domestic sales department telephone: 0757-85394100

Overseas Sales Department Phone: 0757-85393500

Email: info5@shuangoutiles.com

Quality report email: admin@shuangoutiles.com

Official website: <https://www.shuangoutiles.com>

WhatsApp: +86 137 0308 9834

Facebook: Foshan city ShuangOu ceramics co., Ltd